


# 16" Bicycle

## Important owner's information

Please read this before allowing your child to ride the bicycle.

### CORRECT BICYCLE SIZE

Make sure the bicycle you have bought is the correct size for the child. The minimum crotch measurement of the rider, with feet flat on the ground, should be 1" (25mm) less than the height of the bike.

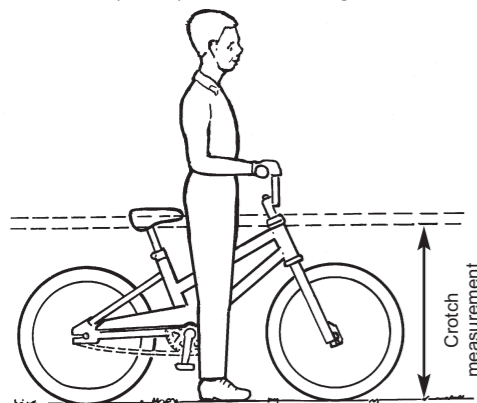

### BICYCLE SET-UP

It is essential that, before moving off, the rider is comfortably seated on the bicycle and not stretching forward to reach the handlebars.

Re-check the instructions given for the installation of the saddle.

### FOR YOUR CHILD'S SAFETY

Recheck that all screws, nuts and bolts are firmly tightened. Make sure that your child is capable of riding this bicycle. Do not allow your child to ride without supervision.

### BASIC MAINTENANCE

To adjust the tension of the chain drive, loosen the two rear wheel retaining nuts and move the back wheel either forwards or backwards to adjust tension. Re-tighten nuts once correct tension is achieved.

Brake blocks must be checked by an adult at regular intervals. It is recommended that the brake blocks are replaced if they become less than 3mm on the shortest side.

Lubricate moving parts with light machine oil at regular intervals or when necessary.

Any wear on tyres must be checked by an adult. Please note helpline number for replacement parts.

### RECOMMENDED TORQUE TOLERANCES

Handlebar securing bolt	18 nm
4 x handlebar to stem bolts	20 nm
Seat post	18 nm
Wheels	20 nm

Please retain this leaflet for reference to the manufacturer. Carefully made in China to European Safety Standards.

Conforms to ISO8098

### CUSTOMER HELPLINE

We make every effort to ensure that this product reaches you in satisfactory condition.

However if you have any queries, need assistance, or find this product defective, please call our Customer Helpline:

**0870 8404255 (UK ONLY)**

DISTRIBUTED BY



MV SPORTS & LEISURE LTD

35 Tameside Drive • Castle Bromwich • Birmingham • B35 7AG • UK  
Email: info@mvsports.com • www.mvsports.com

This bicycle is to be assembled by an adult

Check the contents and only remove the protective packaging from each item as and when it is to be fitted

Please keep the packaging until you have completely assembled the bicycle.

### TRANSIT PROTECTORS


Remove frame protectors and dispose of safely.

Transit protector




### HANDLEBAR ASSEMBLY

1. Insert the handlebar stem into the head tube, making sure that the minimum insertion mark enters into the head tube.
2. Align the handlebars with the the front forks and tighten the handlebar securing bolt.
3. Ensure the 4 pinch clamp bolts are tightened before use.

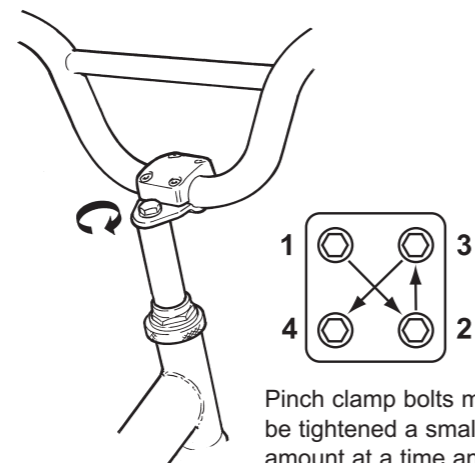

Pinch clamp bolts must be tightened a small amount at a time and they are to be tightened diagonally.

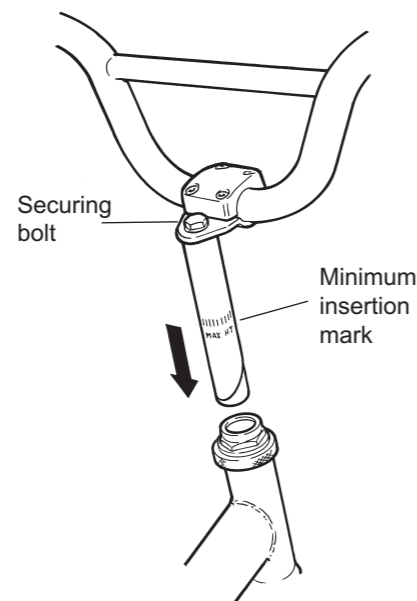

### TOOLS


Spanner sizes:  
10mm for brakes  
13mm for saddle  
15mm for pedals  
Allen key 5mm  
Screwdriver



Tools not supplied

### CONTENTS:


1. Frame assembly
2. Front wheel
3. Mudguard
4. Handlebar
5. Saddle and saddle pillar assembly
6. Stabilizer arm and wheel assembly (x2)
7. Brake assembly
8. Pedals (x2)
9. Bag

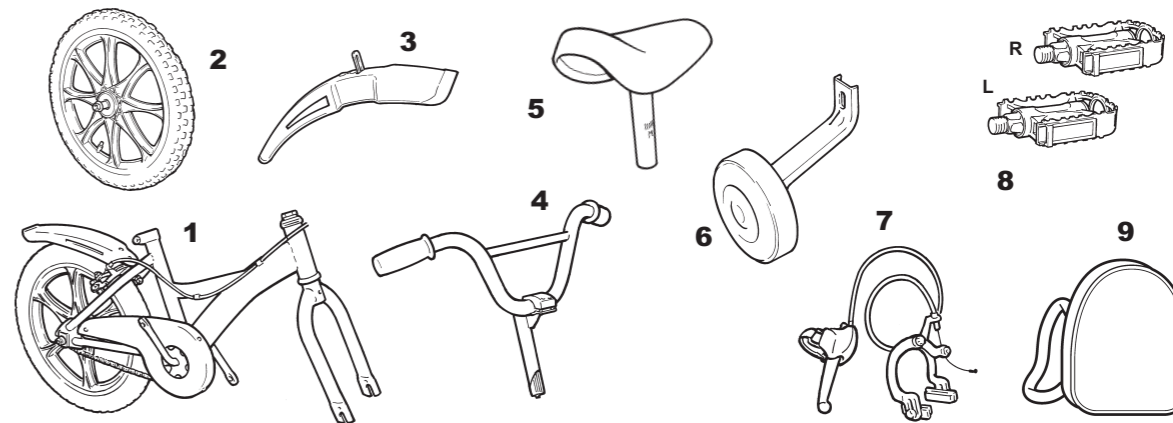

### FITTING THE PEDALS


**NOTE:** The pedals are identified as right hand or left hand by an 'R' or 'L' on the spindle end.

1. Screw the pedal marked 'R' clockwise into the right hand chain wheel crank (side with chainguard) and tighten securely.
2. Screw the pedal marked 'L' anti-clockwise into left hand crank and tighten securely.

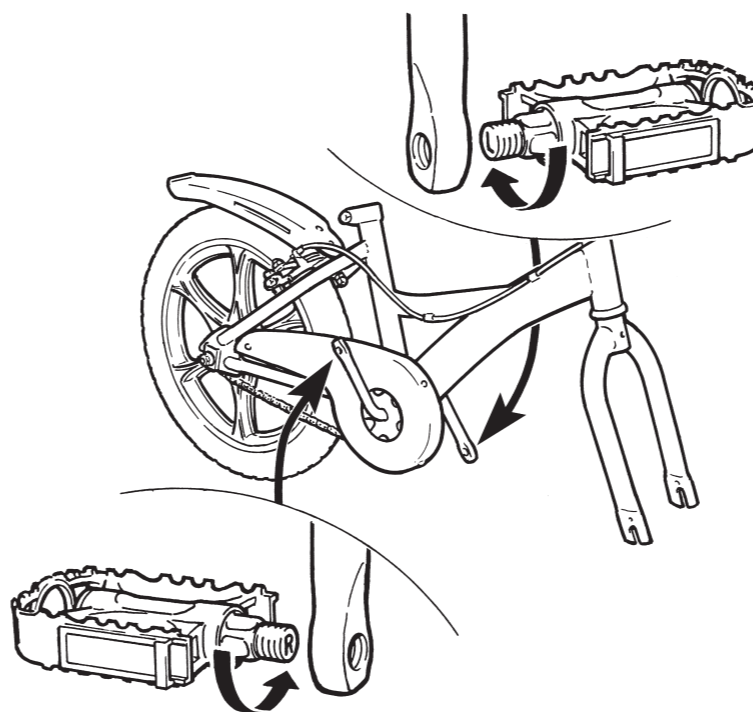


### FITTING THE FRONT MUDGUARD

1. Remove the nut from the rear of the brake calliper assembly.
2. Slide the mudguard bracket over the brake assembly bolt as illustrated.
3. Replace nut and tighten.
4. Adjust brake if necessary. (see "adjusting the brake" overleaf)

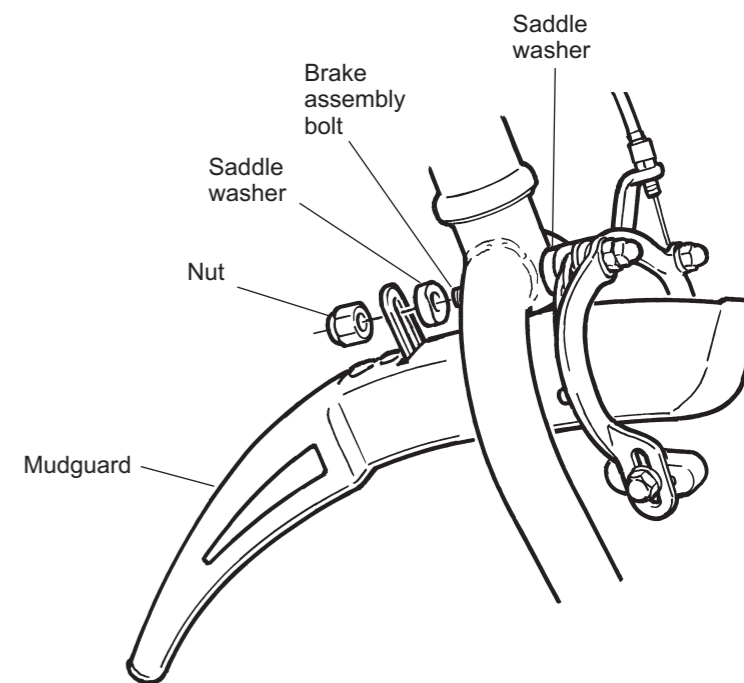


### TIGHTENING THE REAR MUDGUARD

1. Ensure the rear mudguard is aligned over the rear wheel correctly.
2. Tighten the brake assembly nut to secure.
3. Adjust brake if necessary. (see "adjusting the brake" overleaf)

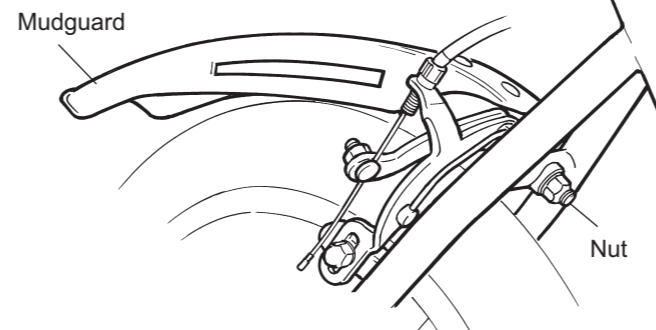


### FRONT WHEEL

1. Loosen the front wheel nuts sufficiently to allow the tabbed locating washers to fit outside the fork end.
2. Insert the front wheel into the front forks, sliding the wheelspindle into the slots in the fork end.
3. Ensure that the locating washer tabs are inserted into the holes in the fork end.
4. Check that the wheel rim is central between the forks and tighten the wheel nuts.

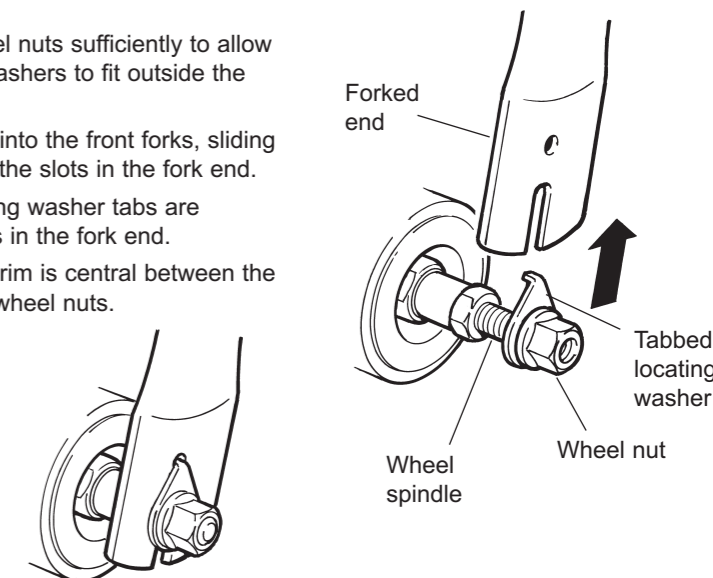

### FITTING THE BRAKE LEVERS



1. Position the brake lever clamp on the handlebar.
2. Insert the bolt and washer through the clamp and secure using nut.
3. The small hexagonal part of the nut fits into the hole in the brake lever clamp.
4. Ensure the brake lever does not swivel on the handlebar tube.
5. Repeat for the other brake lever.

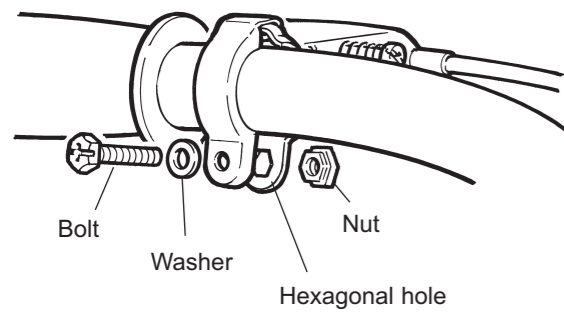

### FITTING THE SADDLE


1. Push the saddle pillar into the down tube at least as far as the Minimum insertion mark.
2. Align the saddle with the bike frame and tighten the clamp.

PROPER SEAT HEIGHT

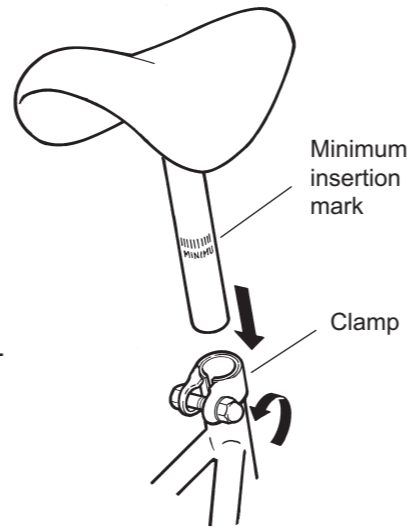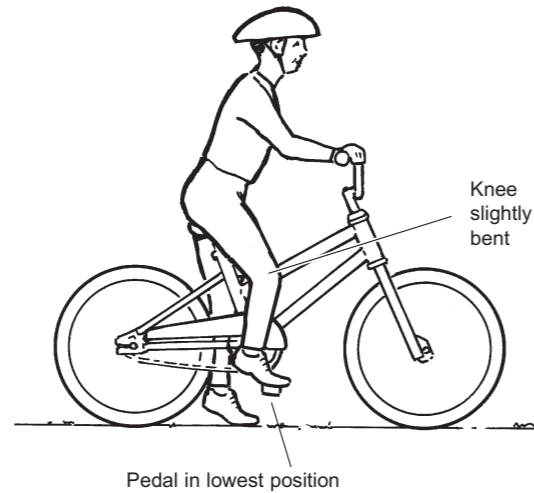


### FITTING THE STABILIZERS

1. Remove the nut from the rear axle frame assembly leaving the stabilizer frame bracket in position.
2. Slide the stabilizer over the threaded axle spindle end.
3. Replace nut and tighten.
4. To adjust the stabilizer wheel height, loosen the nut, slide the stabilizers up or down to adjust the wheel height and retighten the nut.

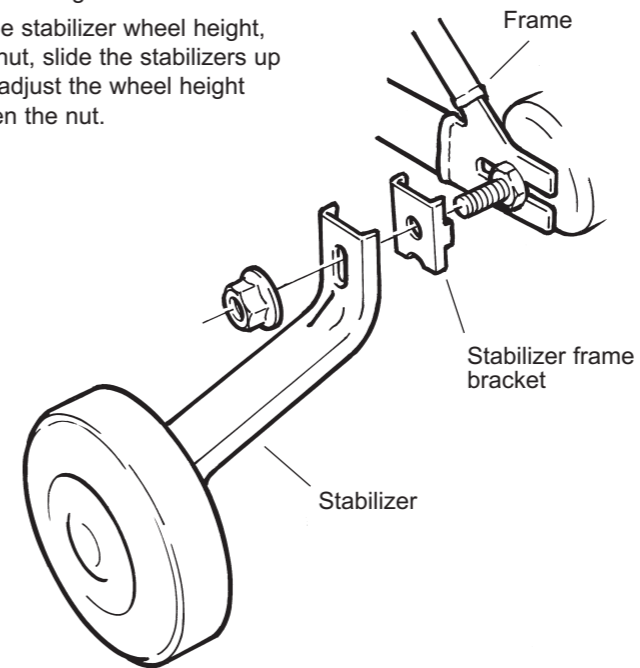


### BICYCLE BAG

1. Fasten the velcro straps around the horizontal tube on the handlebar.

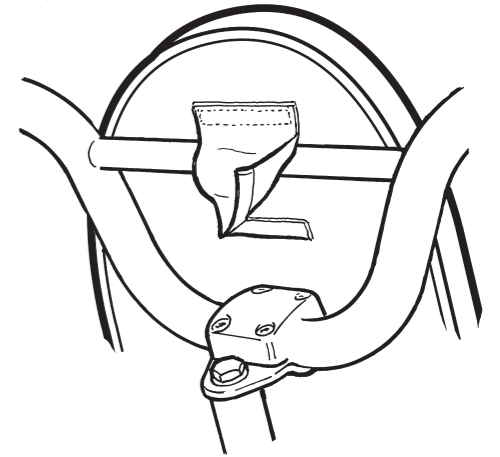


### ADJUSTING THE BRAKE

1. On the front brake arm, loosen the anchor nut and bolt.
2. Squeeze the brake shoes together and using a pair of pliers, pull the inner brake cable tight.
3. Check the brake blocks make contact with the wheel rim and not the tyre.
4. Re-tighten the cable anchor nut and bolt.
5. Using the cable adjuster, adjust the brakes to give 1/16" clearance between the brake blocks and the wheel rim.
6. Tighten the cable adjuster lock nut.

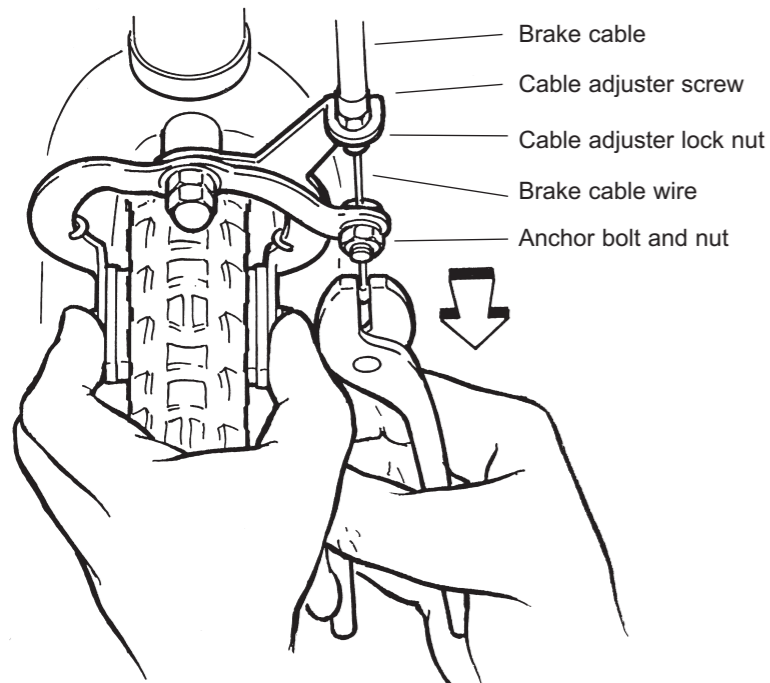

### NOTE:

**Please check all nuts, bolts and fittings are secure before giving to your child.**

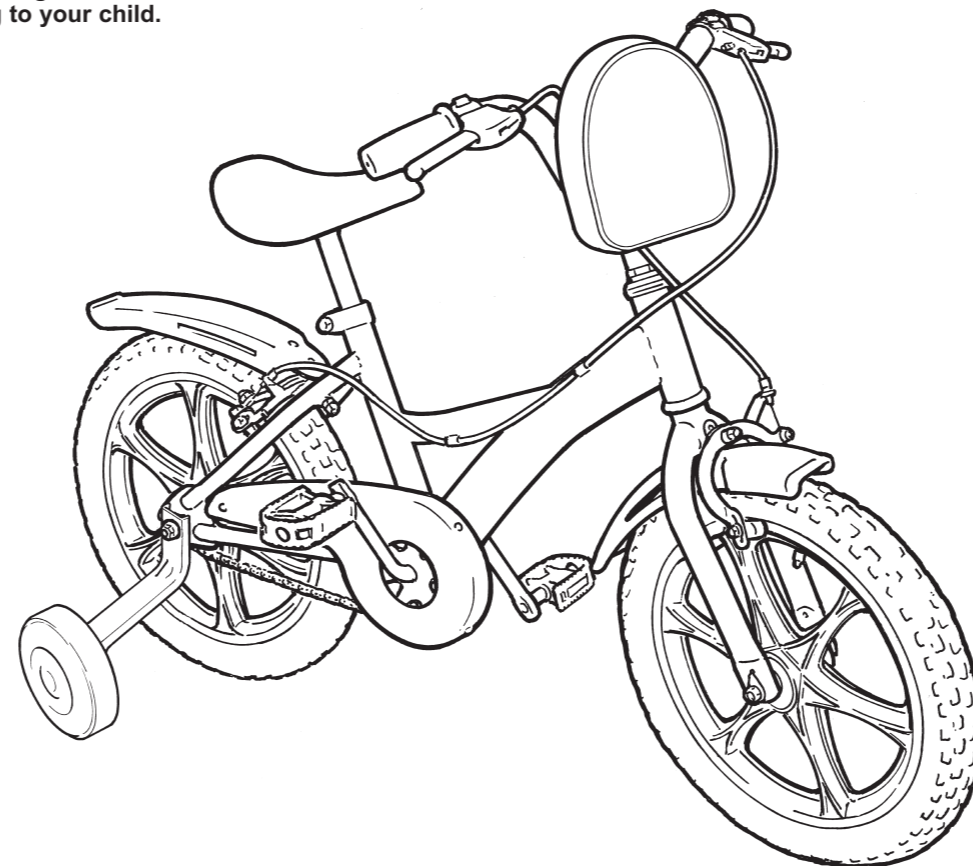

### A GUIDE TO SAFE CYCLING

1. We recommend this bike is for pavement use only.
2. Do not ride at night. Visibility is often limited at dawn and dusk.
3. Always give pedestrians right-of-way, and don't ride too close to them. Never park your bicycle where it can cause a nuisance.
4. Avoid hazards that may cause you to lose control of your bicycle such as pot holes, uneven pavements and manhole covers.
5. Leave plenty of room when passing parked vehicles and watch out for doors being opened in your path.
6. Remember that braking distance should be increased in wet weather, and regular checks of brakes, steering and lighting should be made.
7. Never carry passengers on your bicycle. Never carry packages in your hands while riding, or fix anything to your bicycle that could obstruct your visibility or control.
8. Don't wear anything that restricts your hearing.
9. Always ride with both hands on the handlebars.
10. Don't wear very loose clothing, which could hang down and become caught in the wheels of your bicycle. Wear cuff bands or trouser clips to keep your trousers from getting caught in the chainwheel.
11. We recommend that light-coloured or fluorescent clothing be worn which helps others to see you in daylight and poor light.
12. Always wear proper safety equipment. We recommend a helmet, long-sleeve shirt, long trousers, shoes and elbow and knee pads. Gloves and eye protection also make good sense. Cover your handlebars, stem and top tube with safety pads for extra protection.
13. Don't ride your bicycle if the chain cover is not attached.
14. Tyres to be inspected on a regular basis by an adult. Ensure there is a minimum of 2mm tread and there are no splits in side wall. If in doubt please seek professional advice from your local cycle dealer.

**PLEASE REFER TO THE HIGHWAY CODE REGARDING RULES FOR CYCLISTS.**